

Product highlights

- * Power on self test (POST)
- * Modular components design for easy and quick transportation and maintenance
- * Stable performance, 18 localization zones
- * Powered by safe low voltage DC
- * Password and hardware key access protection
- * Embedded battery back-up and charger
- * Four LED indicating bars showing threat locations on human body
- * Detect threat objects including magnetic, non-magnetic metals and mixed alloys with high sensitivity to find tiny threat
- * Super low detection height



Stabilizer base



Infrared sensor



Remote controller



Key



Technical specification

Operation control	Remote control
Screen	LCD
Detection zone	18 localization zones to precisely identify multiple target locations, 6 from head to toe, 3 from left to right
Minimum height of detection	20mm
Alarm	- Sound and light, four LED light bars on the back and front of the door frame - Multi zones alarm when detected - 9 sounds and 8 volume levels for selection
Counter	Intelligent traffic and alarm counters that calculate traffic flow and resultant alarms.
Sensitivity	Can detect a clip or 1/2 cutter blade
Sensitivity Level	Adjustable from 0 to 999
Adjustable signal frequencies	7000-8999HZ Eliminate the potential effects from X-ray units, radios and other electrical interference sources.
Minimum distance between two WTMD	0.5m at high sensitivity
Low-intensity magnetic field technology	Compliant with international safety standard, and harmless to pacemakers, pregnant women, floppy disks, films, videos, etc.
Shock proof	Avoid false alarm in wind or shock

Tamper-Proof	Operation program is protected by password
Gate material	PVC surface board, fire-proof, corrosion proof, moisture-proof, anti-collision, and no deformation.
Options	Battery, network with PC, turnstile, integrate camera, etc

Operating Environment

Power supply	AC100V~240V 50/60Hz
Maximum power consumption	12W
Operation temperature/Humidity	-20°C ~ 45°C / 0% ~ 98%
Storage Temperature/Humidity	-20°C ~ 55°C / 0% ~ 98%


Physical Specification

Unit weight (kgs)	45
Outer frame	2210mm (h) * 830mm (w) * 475mm (d)
Inner frame	1980mm (h) * 710mm (w) * 400mm (d)
after packed in carton -	
Gross weight (kgs)	56
Packing size	#1 230*26*55cm, 43kg #2 77*27*38cm, 13kg

Compliance

International

- * ISO19001; ISO14001; ISO45001
- * CE EMC, LVD, RoHS
- * FCC

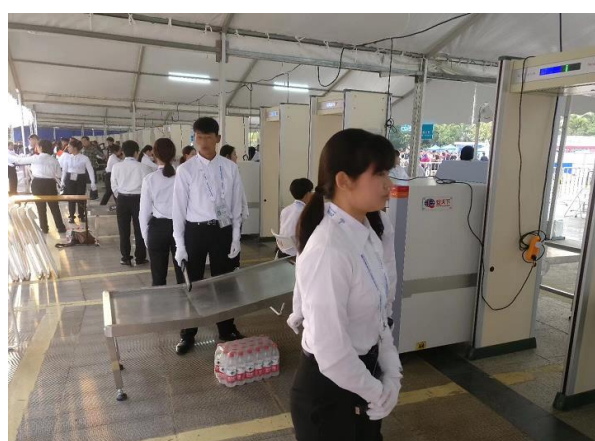

SAFEWAY INSPECTION SYSTEM COMPANY LIMITED

Add: Building A&E, Qifeng Digital Park, Nanwan Street, LongGang District, Shenzhen China

Tel: 0755-84656535 Email: info@chinasafeequipment.com www.chinasafeequipment.com